
1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine					
1.1	drain (max. 700 mm above finished floor level), DN 50					
2.0	Machine connection: fresh water supply, G 3/4"					
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/l CaCO₃ (max. 3°dH)					
	Flow rate: 3 I/min					
	Minimum flow pressure: 60 kPa / 0.6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5.0 bar					
	stopcock and fine screen ≤ 25 µm					
3.0	Machine connection: electrical connection cable 5G 2,5mm²					
3.1	electricity supply to the machine: 3N PE 400V ~ 50Hz					
	nominal current / - capacity: 15.7 A / 6.9 kW					
	Fuse protection: 16 A					
	∀ Voltage equalising cable					
	The master switch must be provided on site					
	Note: Electrical equipment suitable for supply voltage: 3N PE 380-415 V 50 Hz / 1N PE 220-240 V 50 Hz					
6.0	Heat load of warewash area					
6.1	for 20 programme cycles/h total 1.4 kW, perceptible 1.0 kW, latent 0.4 kW					
all cables, pipes etc leaving machine 1,6 m						
the po	he position of the connection piping can also be mirror-inverted!					
Machine Equipment						
	\\ Entry height					

(A) Entry height

Final rinse dosing unit with suction lance (blue connector)

Detergent dosing unit and suction lance



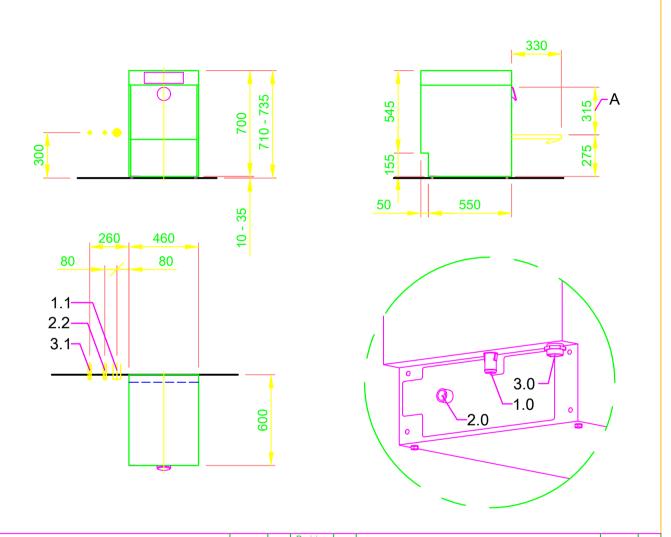

MEIKO Wash-Up Technologies LTD. N0.2, Jingye Road Torch High Tech Industrial Development Zone Zhongshan, Guangdong, P.R.C, Postal code: 528437

Tel:+86 (0)760 85317591 Fax:+86 (0)760 85314217 Website: http://www.meiko.de http://www.meikochina.com

This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change

This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.

	Revision				
	Reference	V A C	LIED	Type	
	DISHWASHER STANDARD DRAWING / CHN			M-ICLEAN US M2	
d	TVDE.	CI.	ACCEC		

TYPE: GLASSES

Drawing-No. Order-No. S00087486

Scale drawn: checked: 1:25 07.08.2020 m-iplan

07.08.2020 m-iplan CCOPYRIGHT by MEIKO

CCOPYRIGHT by MEIKO

CHN

ΕN